

# HPCOOLER

Hydraulic marine propulsion

Oliekoeler

Oil cooler

Ölkühler

Refroidisseur d'huile

Refrigerador del aceite

Refrigeratore olio

Installatie instructies

Installation instructions


Installationsvorschriften

Instructions d'installation

Instrucciones de instalación

Istruzioni per l'installazione


Hoofdafmetingen  
Principal dimensions  
Hauptabmessungen  
Dimensions principales  
Dimensiones principales  
Dimensioni principali

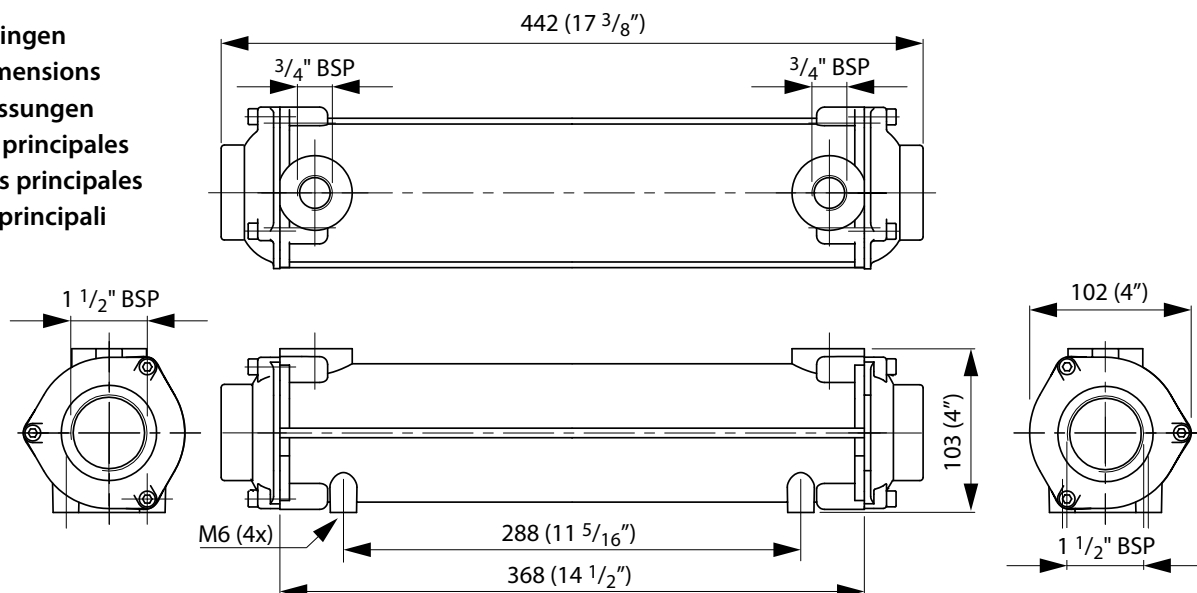

## Technical data

|                                |                                                   |
|--------------------------------|---------------------------------------------------|
| Maximum oil flow               | : 90 l/min<br>(19.8 Imp Gal/min, 23.8 US Gal/min) |
| Maximum sea water flow         | : 30 l/min<br>(6.6 Imp Gal/min, 7.9 US Gal/min)   |
| Internal oil volume            | : 0.97 l (0.21 Imp Gal, 0.26 US Gal)              |
| Internal water volume          | : 0.71 l (0.16 Imp Gal, 0.19 US Gal)              |
| Weight                         | : 4.8 kg (10.6 lbs)                               |
| Maximum working oil pressure   | : 20 bar (290 psi)                                |
| Maximum working water pressure | : 20 bar (290 psi)                                |
| Maximum working temperature    | : 120°C (250 F)                                   |
| Seal                           | : nitrile                                         |
| End covers                     | : bronze                                          |

Installatie  
Installation  
Installation  
Instalación  
Installazione

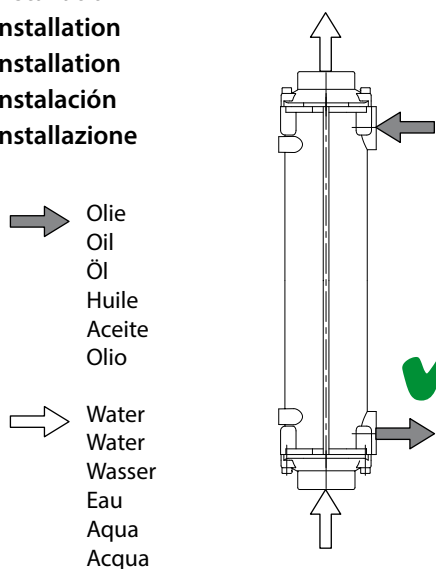

→ Olie  
Oil  
Öl  
Huile  
Aceite  
Olio

→ Water  
Water  
Wasser  
Eau  
Aqua  
Acqua

