



SAILDRIVE LEG	
STM6000	SP60 2,15:1 (3000 rpm)
STM6001	SP60 2,38:1 (3600 rpm)




Engine model	HP	Max rpm	Saildrive	Recommended ratio
M2.13	12	3000	SP60	2,15:1
M2.18	16	3600	SP60	2,38:1
M3.29	27	3600	SP60	2,38:1
M4.35	33	3000	SP60	2,15:1
M4.45	42	3000	SP60	2,15:1
M4.56	52	3000	SP60	2,15:1
VH4.65	65	3000	SP60	2,15:1

Spare parts EN	Onderdelen NL	Technodrive	Technodrive
Model nr:	Model nr.	STM6000	STM6001
Damper (engine mount)	Demper (motorsteun)	KSTEUN100V (2x)	KSTEUN100V (2x)
Anode for Saildrive	Anode voor Saildrive	SP60ANODE	SP60ANODE
Endcap for prop. + bolt	Dopmoer + bout voor schroef	STM6032	STM6032
Rubber Diaphragm	Rubber afdichting/membraan	SP60SEAL1	SP60SEAL1
Rubber Diaphragm (+ hole for sensor SP60)	Rubber afdichting/membraan	SP60SEAL2	SP60SEAL2
Flywheel housing	Vliegwielhuis	M2/M3 (STM6294) M4 (STM7567)	M2/M3 (STM6294) M4 (STM7567)
Bearing/sleeve for propeller shaft SP60	Lager/bus voor schroefas SP60 saildrive	DM16001	DM16001
Breather valve for SP60	Beluchter voor SP60 saildrive	SP60BREATHER	SP60BREATHER
Spacer SP60 saildrive	Afstandhouder SP60 saildrive	VP000146	VP000146
Lubrication oil (2,5ltr min needed)	Smeerolie (2,5ltr min nodig)	VTF1 (3 units)	VTF1 (3 units)
Oil seal for shaft SP60 saildrive	Oliekeerring voor schroefas SP60 saildrive	DM16002	DM16002
Water sensor	Watersensor	VP000180	VP000180
Rubber sheet	Afdichting flap saildrive	VP000181	VP000181

Rubber cover installation


To improve hull efficiency a rubber sheet 3 to 5 mm thick can be fitted; slid it through the SEPROP leg and paste to the hull.

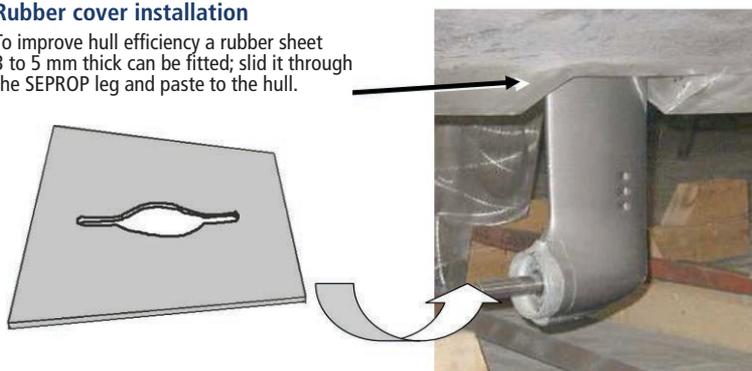

Water sensor: VP000180



Cable: VP000180

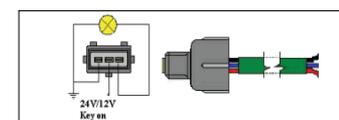


Engine bed Saildrive

SP60: STM9311: M2-M3-M4-Line

SP60: STM9312: VH-M2-M3-Line

ZF: STM9320: and for M4.55/56 for SP60

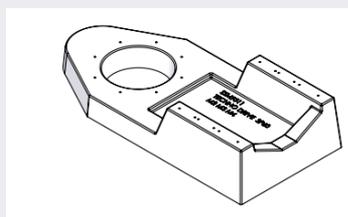


Most cases the old engine bed can be used (1105/1205).

Occasionally you will need to make an iron plate locally so you can fit the engine mountings on the Engine bed.



Spare parts EN	Onderdelen NL	ZF Saildrive
Model nr:	Model nr.	ZF saildrive (STM5800/STM5801)
Damper (saildrive mount)	Demper	1) STM9318
Anode for Saildrive	Anode voor Saildrive	STM9352
Endcap for prop. + bolt	Dopmoer + bout voor schroef	
Rubber Diaphragm	Rubber afdichting/membraan	See ZF saildrive No. 2 (STM9322), 3 (STM9323), 4 (STM9324)
Rubber Diaphragm (+ hole for sensor SP60)	Rubber afdichting/membraan	See ZF saildrive No. 6 (STM9326)
Flywheel housing	Vliegwielhuis	M2.13/18 M4.15/17/35/45/55/56 (STM7567)
Bearing/sleeve for propeller shaft SP60	Lager/bus voor schroefas SP60 saildrive	STM9914 (For STM6294)
Breather valve for SP60	Beluchter voor SP60 saildrive	19-18488
Spacer SP60 saildrive	Afstandhouder SP60 saildrive	13) STM9335
Lubrication oil (2,5ltr min needed)	Smeerolie (2,5ltr min nodig)	

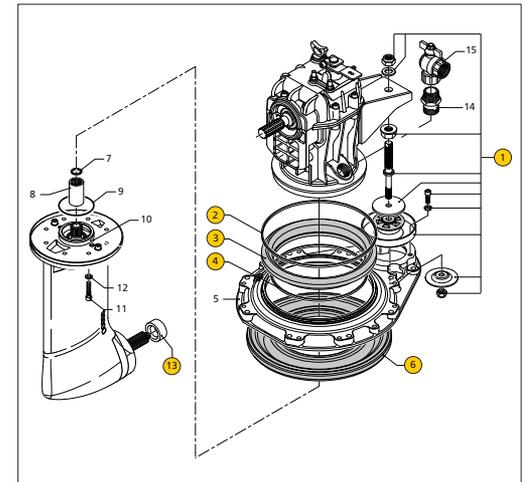

ZF Demperplate
M4: STM6005
STM6006
M4: STM4104
STM9317 (For ZF saildrive)



SAILDRIVE KITS (VOLVO)

Choose saildrive kit (Volvo)		STM7614 kit for saildrive	STM7619 kit for saildrive	STM7621 kit for saildrive
For saildrive		110S	120SB	120S
Saildrive adaptor kit spares	Saildrive adapter kit onderdelen	X	with bolts	X
Bolts and washers for demperplate	Bouten en ring voor demperplaat	VP000179	VP000179	VP000179
1) Intermediate drive shaft	Koppeling	STM7605	STM7606	STM7606
2) O-seal	O-ring	STM7607 (O-seal 29.75x3.53)	STM7608 (O-seal 17x3)	STM7608 (O-seal 17x3)
5) Adaptor housing	Adapterhuis	STM7601	STM7602	STM7601
6) Cover	Deksel	STM7603	STM7603	STM7603
11) Adapter flange	Adapter flens	X	X	STM7604
19) Demperplate (ordered sep.)	Demperplaat (apart bestellen)			Demperplate: M2/3: STM6106 M4: STM4054 M4.56: STM4104

